



DOWEX MONOSPHERE 650C NG (H)

A Uniform Particle Size Strong Acid Cation Exchange Resin for Demineralization in Nuclear Water Applications

Product	Type	Matrix	Functional group
DOWEX™ MONOSPHERE™ 650C NG (H)	Strong acid cation	Styrene-DVB, gel	Sulfonic acid

Guaranteed Sales Specifications		H ⁺ form							
Total exchange capacity, min.	eq/L kgr/ft ³ as CaCO ₃	2.0 43.7							
Water content	%	46 - 51							
Bead size distribution [†]									
Mean particle size	μm	650 ± 50							
Uniformity coefficient, max.		1.1							
< 300 μm, max.	%	0.2							
Whole uncracked beads, min.	%	95							
Crush strength									
Average, min.	g/bead	500							
> 300 g/bead, min.	%	95							
Ionic conversion, min.	%	99.7							
Trace metals, ppm dry resin, max.									
Na	Fe	Cu	Al	Mg	Ca	Co	Pb	Hg	Heavy metals (as Pb)
50	50	10	50	50	50	30	10	10	10

Typical Physical and Chemical Properties		H ⁺ form	
Particle density	g/mL	1.22	
Shipping weight	g/L lbs/ft ³	785 49	

Recommended Operating Conditions

- Maximum operating temperature 130°C (265°F)
- pH range 0 - 14
- Bed depth, min. 450 mm (1.5 ft)

[†] For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775)

Typical Properties and Applications

DOWEX MONOSPHERE 650C NG (H) uniform particle size, nuclear grade cation resin has outstanding purity and performance.

This resin is supplied with a minimum of 99.7% of ionic sites in the H⁺ form. It also has excellent physical and chemical stability and low metallic impurity levels.


DOWEX MONOSPHERE 650C NG (H) resin can be used as a single resin or in mixed beds together with DOWEX MONOSPHERE 550A LC NG (OH) anion exchange resin.

Packaging

50 liter or 5 cubic foot fiber drums

Figure 1. Pressure Drop Data

Temperature = 20° C (68° F)

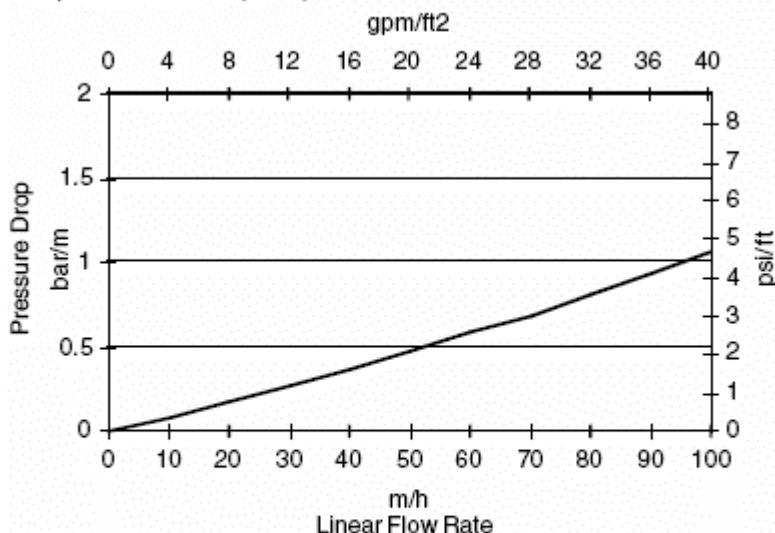

For other temperatures use:

$$P_T = P_{20^\circ\text{C}} / (0.026 T_{^\circ\text{C}} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68^\circ\text{F}} / (0.014 T_{^\circ\text{F}} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

DOWEX Ion Exchange Resins

For more information about DOWEX resins, call the Dow Liquid Separations business:

North America: 1-800-447-4369
Latin America: (+55) 11-5188-9222
Europe: (+32) 3-450-2240
Pacific: +60 3 7958 3392
Japan: +813 5460 2100
China: +86 21 2301 9000
<http://www.dowex.com>

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

