



DOWEX MONOSPHERE 750C (H)

A Uniform Particle Size Strong Acid Cation Exchange Resin for Mixed Bed Demineralization and Condensate Polishing Applications

Product	Type	Matrix	Functional group
DOWEX* MONOSPHERE* 750C (H)	Strong acid cation	Styrene-DVB gel	Sulfonic acid

Guaranteed Sales Specifications			H ⁺ form
Total exchange capacity, min.		eq/l kgr/ft ³ as CaCO ₃	2.0 43.7
Water content		%	46 – 51
Bead size distribution [†]			
Mean particle size		μm	765 ± 25
Uniformity coefficient, max.			1.15
> 900μ, max.		%	5
< 400μ, max.		%	0.5
Whole uncracked beads, min.		%	95
Crush strength			
Average, min.		g/bead	500
> 300 g/bead, min.		%	95
Trace metals, ppm dry resin, max.			
Na	Fe	Cu	Al
60	50	10	50

Typical Physical and Chemical Properties

Total swelling (Na ⁺ → H ⁺)	%	7
Particle density	g/ml	1.22
Shipping weight	g/l lbs/ft ³	784 49

Recommended Operating Conditions

- Maximum operating temperature 130°C (265°F)
- pH range 0-14
- Bed depth, min. 800 mm (2.6 ft)
- Flow rates:
 - Service/fast rinse 5-60 m/h (2-24 gpm/ft²)
 - Service/condensate polishing 40-150 m/h (16-60 gpm/ft²)
 - Backwash See figure 1
 - Co-current regeneration/displacement rinse 1-10 m/h (0.4-4 gpm /ft²)
- Total rinse requirement 3 – 6 Bed volumes
- Regenerant 1-10% H₂SO₄ or 4-8% HCl

[†] For additional particle size information, please refer to Particle Size Distribution Cross Reference Chart (Form No. 177-01775).

Typical properties and applications


DOWEX MONOSPHERE 750C (H) cation exchange resin is a condensate polishing grade resin with high total exchange capacity, uniform particle size, exceptional bead integrity and a distinguishable dark color. It is ideally suited to the high flow rate demands of condensate polishing applications.

The combination of uniform particle size and a 765-micron average bead diameter makes this resin an excellent choice for use with the DOWEX MONOSPHERE 700A (OH) anion resin. The uniform particle size will enable excellent separation to reduce contaminant ion leakage, while the larger bead diameters will minimize pressure drop across the mixed bed resin. This is especially important in high velocity condensate polishing conditions of systems with a Tripol-design.

Packaging

25 liter bags or 5 cubic feet fiber drums

Figure 1. Backwash Expansion Data

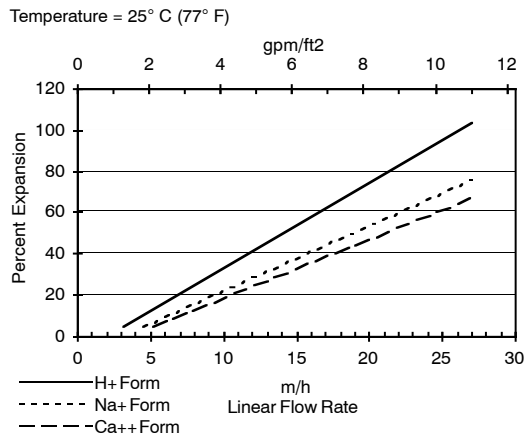


For other temperatures use:

$$F_T = F_{77°F} [1 + 0.008 (T_{°F} - 77)], \text{ where } F \equiv \text{gpm/ft}^2$$

$$F_T = F_{25°C} [1 + 0.008 (1.8T_{°C} - 45)], \text{ where } F \equiv \text{m/h}$$

Figure 2. Pressure Drop Data

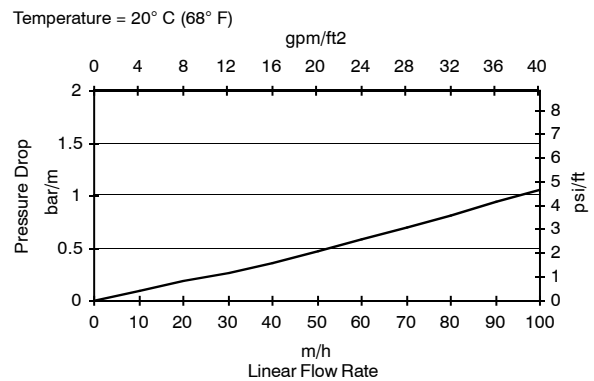

For other temperatures use:

$$P_T = P_{20°C} / (0.026 T_{°C} + 0.48), \text{ where } P \equiv \text{bar/m}$$

$$P_T = P_{68°F} / (0.014 T_{°F} + 0.05), \text{ where } P \equiv \text{psi/ft}$$

DOWEX Ion Exchange Resins

For more information about DOWEX resins, call the Dow Liquid Separations business:

North America: 1-800-447-4369
 Latin America: (+55) 11-5188-9277
 Europe: (+32) 3-450-2240
 Japan: (+81) 3-5460-2100
 Australia: (+61) 3-9226-3545
<http://www.dowex.com>

Warning: Oxidizing agents such as nitric acid attack organic ion exchange resins under certain conditions. This could lead to anything from slight resin degradation to a violent exothermic reaction (explosion). Before using strong oxidizing agents, consult sources knowledgeable in handling such materials.

Notice: No freedom from any patent owned by Seller or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other governmental enactments. Seller assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

